

PENNO®

PRESSWOOD PALLET

Model No. PS-1414-95-S4



Quality Control



ISPM 15



Recycle



Cost Saving



PENNO PACK-TECH CO.,LTD


No.4 Yangcheng Rd,Fengdu Industrial Zone,Pingyao Town,
Yuhang District, Hangzhou, China, 311115

Fax: +86 571 8873 4708 | TEL: +86 571 8873 1169


sales@penno-pallet.com | www.penno-pallet.com





Side View



End View

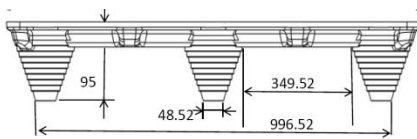

Top View

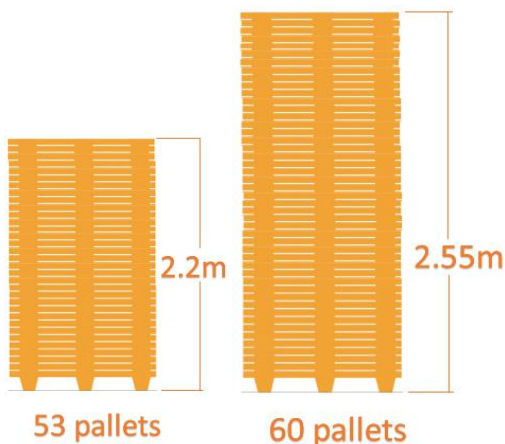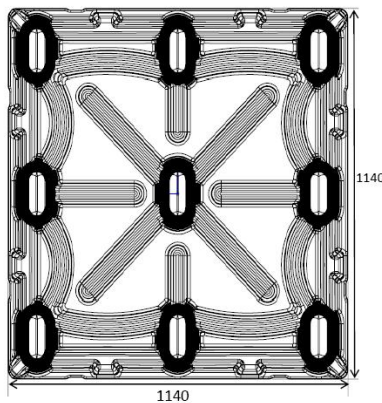

Specification

Model No.	PS-1414-95-S4
Dimension (MM)	1140*1140*139
Weight (KG)	17.5 ± 1.0 kg
Forklift Entry	Four-way
Loading Capacity*	2500 KGS (Dynamic)
	8000 KGS (Static)
Qty / Container	500 PCS / 20'GP
	1200 PCS / 40'HQ

Nestable

Saves your 70% valuable storage space and 50% transportation cost

Competitive Price

Almost half price for a new export pallet. An ideal alternative to conventional wooden pallets and expensive

ISPM15 Compliance - Export

The manufacturing process of compress wood pallet takes place under high temperatures and pressure which exterminates bugs, infestation and eliminates the need for costly fumigation or heat treatment prior to export.

Safety Operation

Rounded corners and No-nail's or screw's design to prevent package from damage and help reduce employee injuries.

